


Quadplexer698-960,1710-1880,1920-2170,2300-2700

- ◆ Frequency covers 617-960,1710-1880,1920-2170,2300-2700MHz
- ◆ Low PIM
- ◆ Pole or wall mounting
- ◆ Suitable for indoor and outdoor applications

Specifications :

Part No.	HT-IBS.24			
Description	Quadplexer(617-960/1800/2100/2700MHz)4.3-10for5G			
ZTTProductCode	ZR-QP300-4310-61727-160			
FrequencyRange(MHz)	698-960	1710-1880	1920-2170	2300-2700
InsertionLoss(dB)	<0.4			
Isolation(dB)	>50			
ReturnLoss(dB)	≥19			
VSWR(dB)	≤1.25			
PIM(dBm)	≤-160dBc(with2x43dBm)			
MaximumInput(W)	300W			
Operatingtemperature(°C)	-40°Cto+85°C			
Relativehumidity(°C)	0~95%			
Impedance (Ω)	50Ω			
Size (mm)	205x167x46.7mm			
Weight(g)	3000g			
LightningProtection	3kA;10/350μspulse			
ConnectorType	4.3-10Female			
Ingressprotection	IP67			
Color	Grey(ML440c)			
ROHS	Satisfy			

Outline drawing :

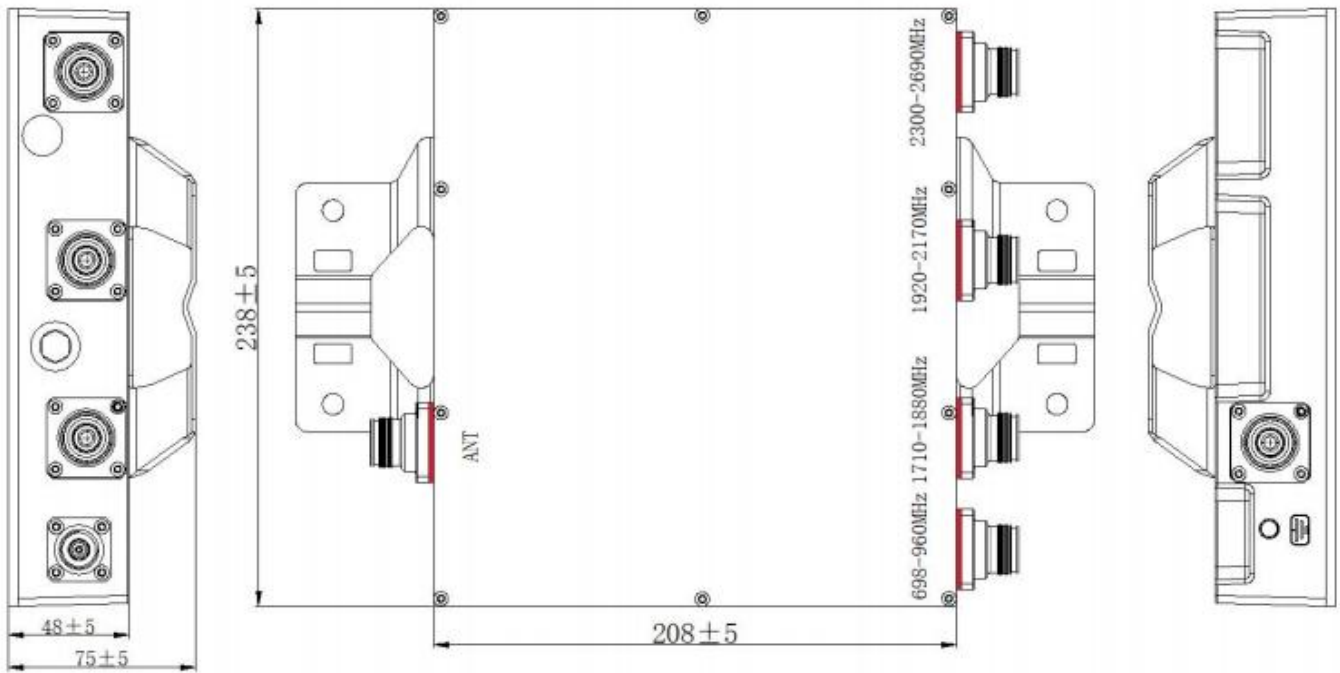

Product Image:

