



## HTFL-0727-PMO

Freq(MHz)	1710-1725 1735-1755 1805-1820 1830-1850 1920-1960 2110-2150 2500-2520 2540-2560 2620-2640 2660-2680	703-803
Insertion Loss(dB)	≤1.5	≤1.0
Out-of-band inhibition(dB)	≥25@1730MHz    ≥25@1760MHz    ≥25@1785MHz    ≥25@1830MHz ≥25@1855MHz    ≥25@1965MHz    ≥25@2155MHz    ≥25@2530MHz ≥25@2570MHz    ≥25@2650MHz    ≥25@2690MHz	
Return loss/VSWR	≤-18dB/1.3	
Intermodulation (dBc)	≤-150dBc@2*43dBm (RX Band)	
Impedance	50 ohm	
Input power (W)	100 W	
Operation temperature	-0°C to +55°C	
Storage temperature	-20°C to +75 °C	
Degree of protection	Indoor	
Connector	4310-Female	
Relative Humidity	5%-95%	
Dimensions(WxHxD) without mounting brackets	450*398*200mm	


### 1710-1725

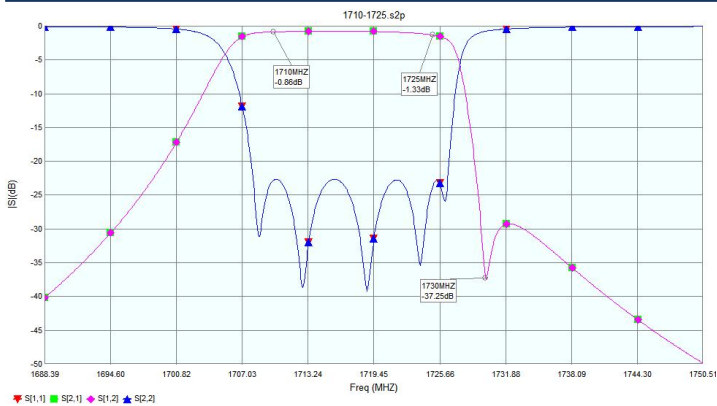


### 1735-1755

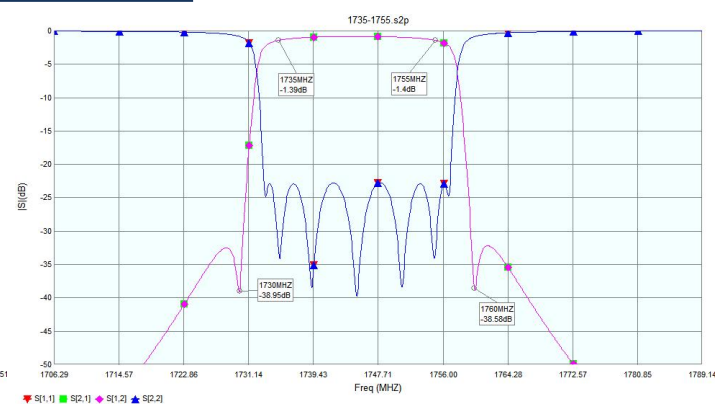


### 1805-1820

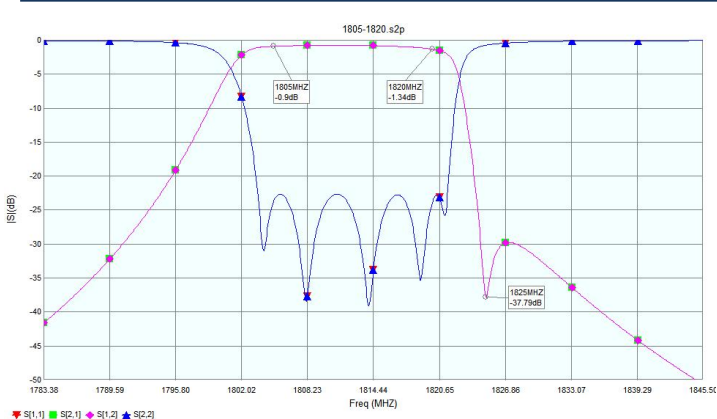


### 1830-1850

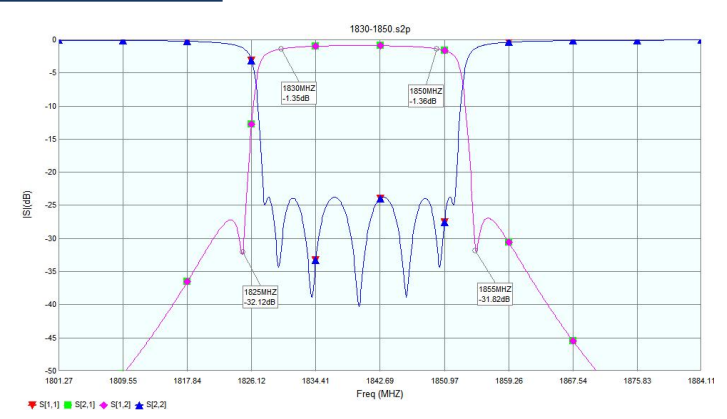


1920-1960

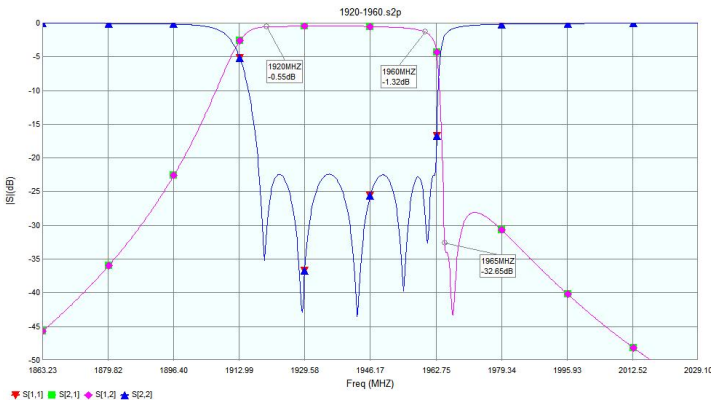


2110-2150

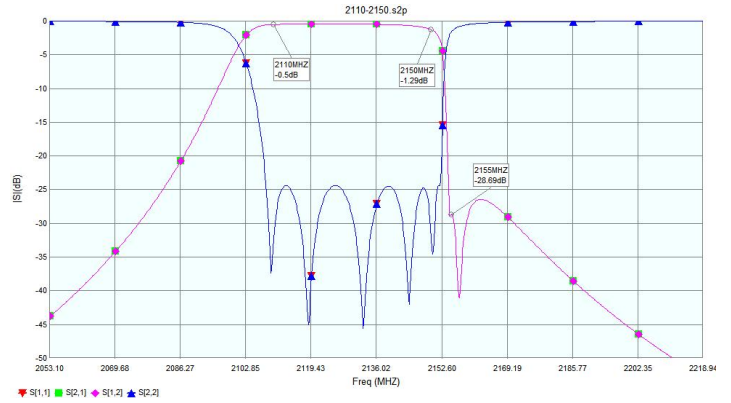


2500-2520

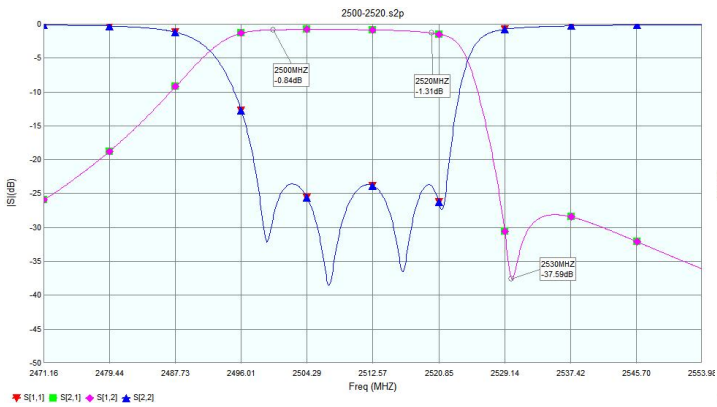


2540-2560

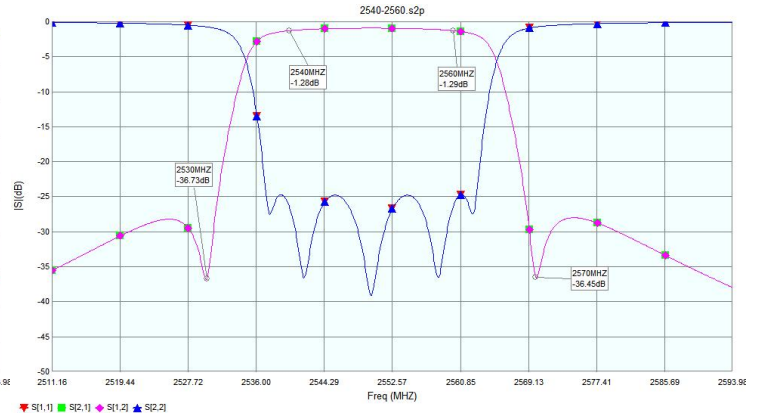

2620-2640

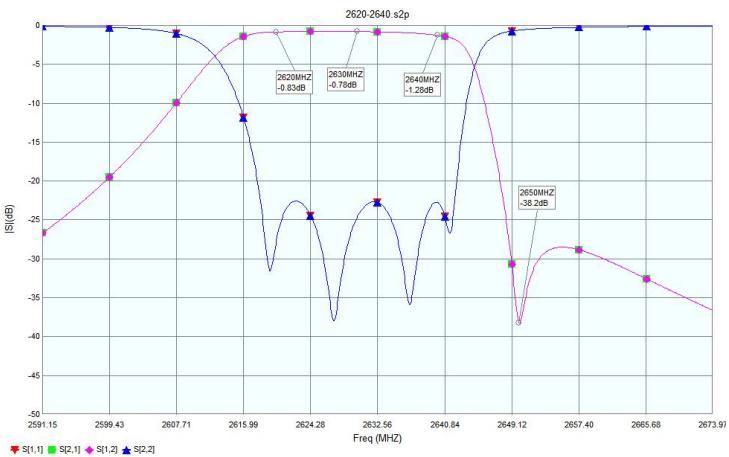

2660-2680

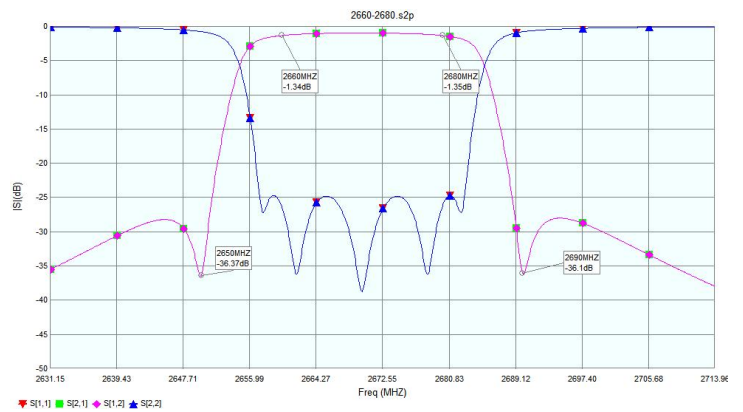

Outline drawing

