

698-4000MHz Power Splitter 2/3/4 way 4.3-10-Female


- Wide frequency range 698 to 4000 MHz for 2G/3G/4G/5G applications
- Low passive intermodulation -160dBc
- Low VSWR & insertion loss
- Indoor & outdoor use; IP65
- Connector Type 4.3-10 Female Available




Specifications :

Part No.	HT-PS-0640-02-43F-160	HT-PS-0640-03-43F-160	HT-PS-0640-04-43F-160
Electrical			
Frequency range (MHz)	698-4000		
INPUT	2way	3way	4way
VSWR	≤1.25		
Insertion Loss(dB)	≤3.5	≤5.3	≤6.6
PIM (dBc)@2*43dbm	≤-160		
Impedance (Ω)	50 Ω		
Input power (W)	300		
Environmental			
Operation temperature	-40°C to +65 °C		
Storage temperature	-55°C to +85 °C		
Relative humidity	5% - 95%		
Application	Indoor or outdoor (IP65)		
Mechanical			
Connector	4.3-10 Female		
Color	Black		
Weight(kg)	≤0.40	≤0.4	≤0.50
Dimension(mm)	225×25X25	233 × 25 × 25	233×25×25


Outline Draw

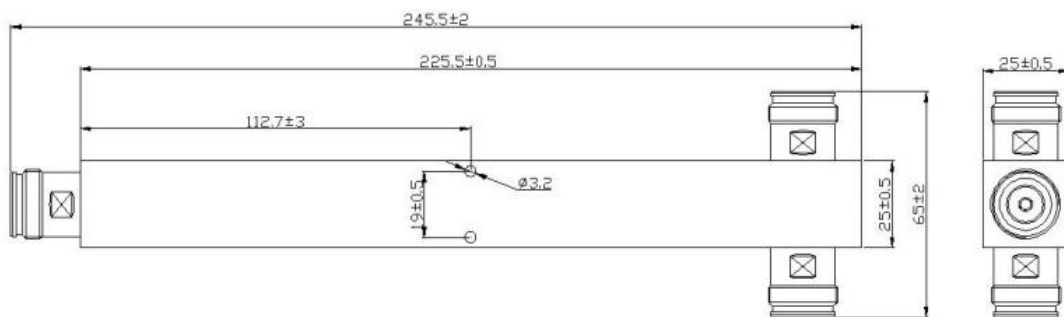

2-way

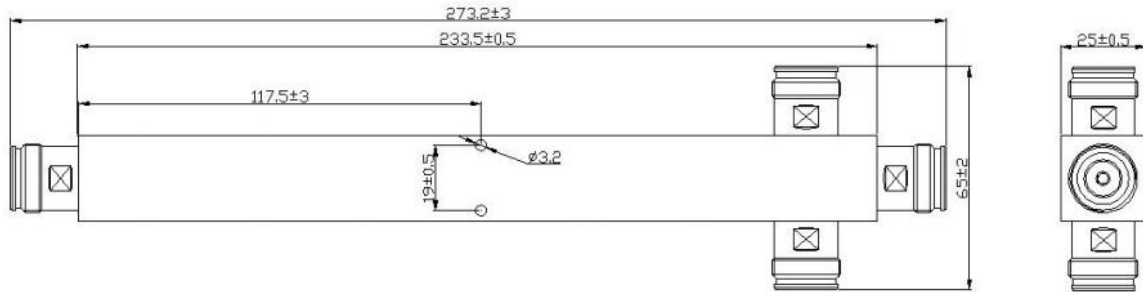

3-Way

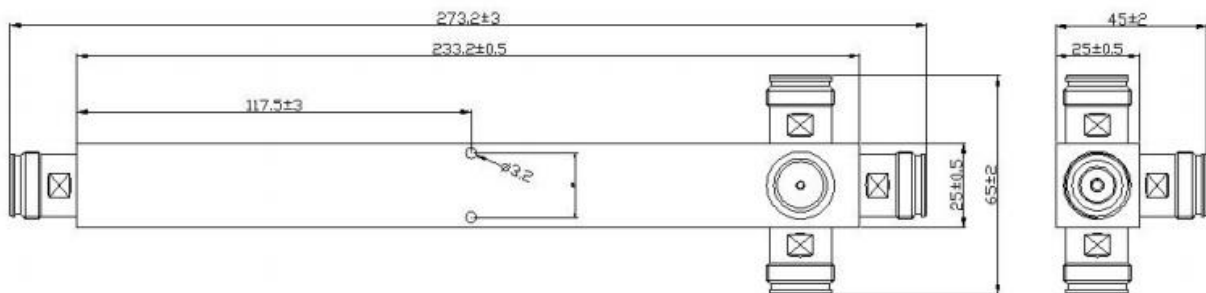

4-way