


1/2" Superflex Jumper, 4.3/10 Male straight to 4.3/10 Male straight

Specifications :

Part No.	12S-4310M-4310M-L
Electrical Performance	
Characteristic Impedance	50 ohm
Frequency Range	DC-6GHz
VSWR	≤1.12(DC-3GHz),
PIM3	≤-160dBc
Dielectric Withstanding Voltage	≥2500V RMS,50Hz,at sea level
Dielectric Resistance	≥5000MΩ
Contact Resistance	Center Contact ≤1.0mΩ Outer Contact ≤1.0mΩ
Durability	Mating cycles ≥500
Material and plating	
Body	Brass, Tri-Alloy plating
Insulator	PTFE, NATURAL
Contact PIN	Phosphor Bronze,Ag plating
Environmental	
Temperature Range	-40°C~+85°C
Waterproof(1m water depth, 24hours)	IP68
RoHS	Full RoHS-Compliance

Outline drawing :

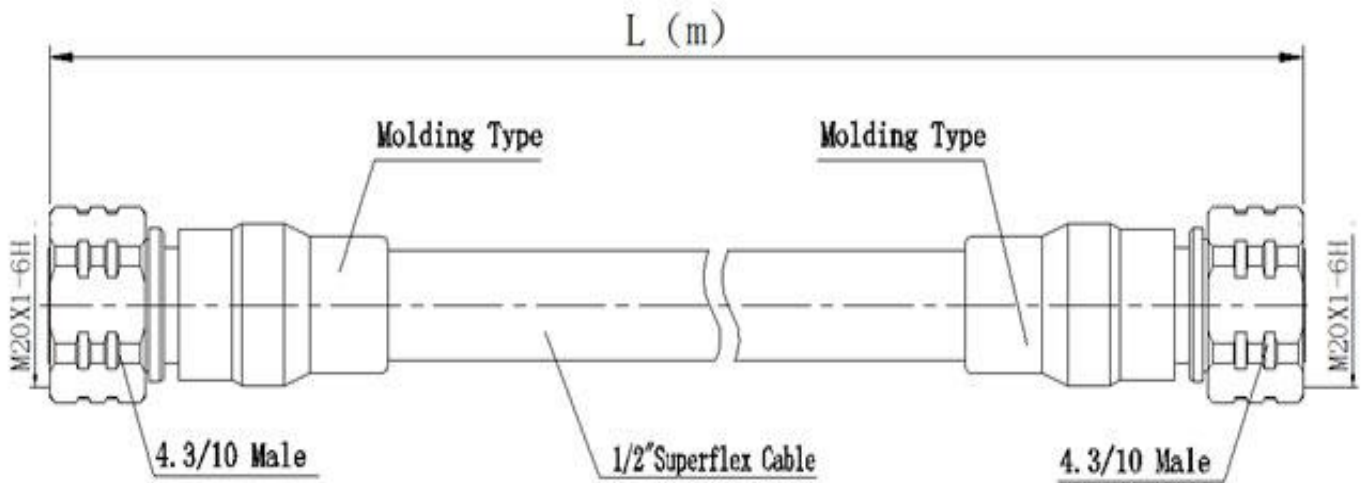

Product picture :

