


AISG male to AISG female -8 PINS

Specifications :

Part No.	HC-AISG-MF-8PINS-Lm		
Product Description			
Cable Type	24AWG cable		
	Inner conductor	Copper, diameter 0.5mmx8C	
	First conductor	Copper braid,	
	Jacket	Black PE ,diameter 6.5mm	
Cable Length	Lm		
Connectors	Connector 1、 2	AISG type male	AISG type Female
	Inner Conductor	Brass/Gold Plating	Brass/Gold Plating
	Body&Outer Conductor	Brass/Nickel Plating	Brass/Nickel Plating
	Insulator	POM	POM
	Gasket	Silicon Rubber	Silicon Rubber
	Nut	Brass/Nickel Plating	Brass/Nickel Plating
Electrical Characteristics			
Description	AISG Male	AISG Female	
+12 VDC Nominal	1	1	
NO Connection	2	2	
RS485B	3	3	
RS485B Ground	4	4	
RS485A	5	5	
+24 VDC Nominal	6	6	
DC Return	7	7	
NO Connection	8	8	
Environmental Specifications			
Rate current	4A		
Single Bend radius	60 mm Min		
Multiple Bend radius	120 mm Min		
Temperature Range	-40°C to +80°C		
Protection Class	IP67(Coupled)		
RoHS	Compliant		
Application scene	Indoor/Outdoor		

Outline drawing :

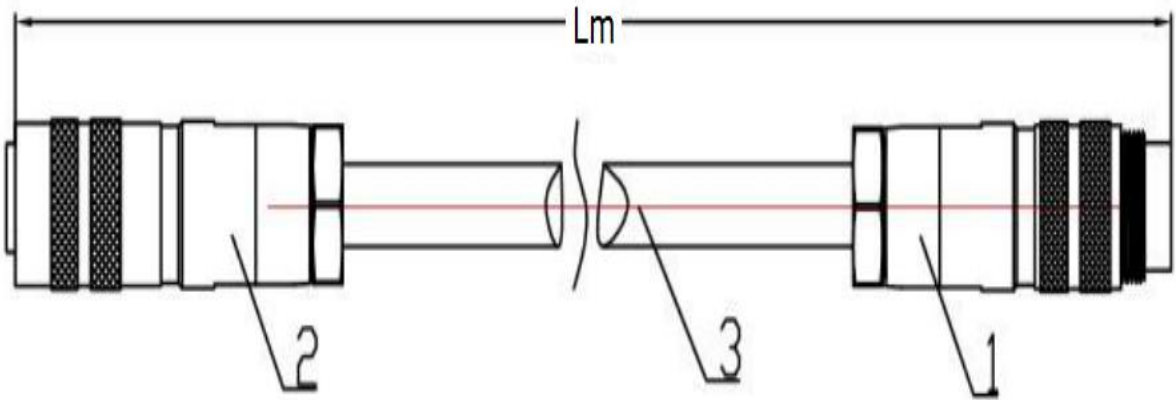

Product picture :

